


Eye & Eye

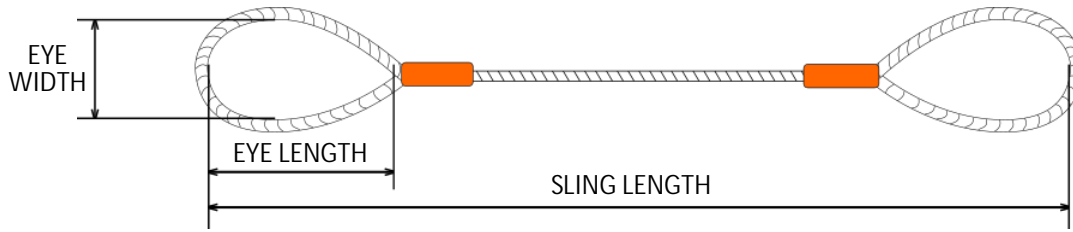

Rope Dia. (Inch)	Vert (Tons)	Choker Hitch (Tons)	Basket Hitch (Tons)				Standard Eye Dimensions		Thimble Eye Dimensions		Hook WLL (Tons)
			90°	60°	45°	30°	Width	Length	Width	Length	
1/4	0.65	0.48	1.30	1.10	0.91	0.65	2"	4"	7/8"	1-5/8"	1.00
5/16	1.00	0.74	2.00	1.70	1.40	1.00	2-1/2"	5"	1-1/16"	1-7/8"	1.00
3/8	1.40	1.10	2.90	2.50	2.00	1.40	3"	6"	1-1/8"	2-1/8"	1.50
7/16	4.90	1.40	3.90	3.40	2.70	1.90	3-1/2"	7"	1-1/4"	2-3/8"	2.00
1/2	2.50	1.90	5.10	4.40	3.60	2.50	4"	8"	1-1/2"	2-3/4"	3.00
9/16	3.20	2.40	6.40	5.50	4.50	3.20	4-1/2"	9"	1-1/2"	2-3/4"	4.50
5/8	3.90	2.90	7.80	6.80	5.50	3.90	5"	10"	1-3/4"	3-1/4"	4.50
3/4	5.60	4.10	11.00	9.70	7.90	5.60	6"	12"	2"	3-3/4"	7.00
7/8	7.60	5.60	15.00	13.00	11.00	7.60	7"	14"	2-1/4"	4-1/4"	11.00
1	9.80	7.20	20.00	17.00	14.00	9.80	8"	16"	2-1/2"	4-1/2"	11.00
1 1/8	12.00	9.10	24.00	21.00	17.00	12.00	9"	18"	2-7/8"	5-1/8"	15.00
1 1/4	15.00	11.00	30.00	26.00	21.00	15.00	10"	20"	2-7/8"	5-1/8"	15.00
1 3/8	18.00	13.00	36.00	31.00	25.00	18.00	11"	22"	3-1/2"	6-1/4"	22.00
1 1/2	21.00	16.00	42.00	37.00	30.00	21.00	12"	24"	3-1/2"	6-1/4"	22.00
1 5/8	24.00	18.00	49.00	42.00	35.00	24.00	13"	26"	4"	8"	30.00
1 3/4	28.00	21.00	57.00	49.00	40.00	28.00	14"	28"	4-1/2"	9"	30.00
2	37.00	28.00	73.00	63.00	52.00	37.00	16"	32"	6"	12"	37.00
2 1/4	44.00	35.00	59.00	77.00	63.00	44.00	18"	36"	7"	14"	45.00
2 1/2	54.00	42.00	109.00	94.00	77.00	54.00	20"	40"			
2 3/4	65.00	51.00	130.00	113.00	92.00	65.00	22"	44"			
3	77.00	60.00	153.00	133.00	108.00	77.00	24"	48"			
3 1/2	102.00	79.00	203.00	176.00	144.00	102.00	28"	56"			
4	130.00	101.00	260.00	224.00	183.00	130.00	32"	64"			

All capacities in tons of 2,000lbs.

Rated basket hitch capacities based on D/d ratio of 25:1

Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter

Rated capacities based on design factor of 5:1. Horizontal sling angles less than 30 shall not be used.